

Amodel® A-1565 HS

polyphthalamide

Amodel® A-1565 HS is a 65% glass and mineral-reinforced polyphthalamide (PPA) designed to be cost-effective in applications requiring high stiffness, good dimensional stability and good

retention of stiffness at elevated temperatures. This grades also exhibits a high deflection temperature and flexural modulus.

- Black: A-1565 HS BK 324

General

Material Status	• Commercial: Active		
Availability	• Africa & Middle East • Asia Pacific • Europe	• Latin America • North America	
Filler / Reinforcement	• Glass Fiber \ Mineral, 65% Filler by Weight		
Additive	• Heat Stabilizer		
Features	• Chemical Resistant • Creep Resistant • Good Dimensional Stability • High Heat Resistance	• Low CLTE • Low Warpage • Lubricated • Ultra High Stiffness	
Uses	• Automotive Applications • Automotive Under the Hood • Housings	• Industrial Applications • Industrial Parts • Pump Parts	
RoHS Compliance	• RoHS Compliant		
Automotive Specifications	• ASTM D4000 PA121 R65 Color: BK324 Black • ASTM D6779 PA121R65	• DELPHI M-53294 Color: BK324 Black	
Appearance	• Black		
Forms	• Pellets		
Processing Method	• Injection Molding		

Physical	Dry	Conditioned	Unit	Test method
Density	1.90	--	g/cm ³	ISO 1183/A
Molding Shrinkage				ASTM D955
Flow	0.30	--	%	
Across Flow	0.50	--	%	
Water Absorption (24 hr)	0.10	--	%	ASTM D570

Amodel® A-1565 HS

polyphthalamide

Mechanical	Dry	Conditioned	Unit	Test method
Tensile Modulus				
--	20700	20800	MPa	ASTM D638
23°C	19700	--	MPa	ISO 527-1
100°C	15400	--	MPa	ISO 527-1
150°C	5720	--	MPa	ISO 527-1
175°C	5100	--	MPa	ISO 527-1
Tensile Stress				
Break, 23°C	138	--	MPa	ISO 527-2
Break, 100°C	91.7	--	MPa	ISO 527-2
Break, 150°C	46.2	--	MPa	ISO 527-2
Break, 175°C	32.4	--	MPa	ISO 527-2
--	131	123	MPa	ASTM D638
Tensile Elongation				
Break	1.2	1.2	%	ASTM D638
Break, 23°C	1.0	--	%	ISO 527-2
Break, 100°C	1.3	--	%	ISO 527-2
Break, 150°C	2.4	--	%	ISO 527-2
Break, 175°C	1.8	--	%	ISO 527-2
Flexural Modulus				
--	17900	18000	MPa	ASTM D790
23°C	9100	--	MPa	ISO 178
100°C	6830	--	MPa	ISO 178
150°C	2480	--	MPa	ISO 178
175°C	2280	--	MPa	ISO 178
Flexural Strength				
--	210	196	MPa	ASTM D790
23°C	211	--	MPa	ISO 178
100°C	163	--	MPa	ISO 178
150°C	69.6	--	MPa	ISO 178
175°C	55.8	--	MPa	ISO 178
Compressive Strength (13.0 mm)	189	--	MPa	ASTM D695
Shear Strength	71.0	49.6	MPa	ASTM D732
Impact				
Charpy Notched Impact Strength (23°C)	3.4	--	kJ/m²	ISO 179/1eA
Charpy Unnotched Impact Strength (23°C)	44	--	kJ/m²	ISO 179/1eU
Notched Izod Impact				
--	37	32	J/m	ASTM D256
23°C	4.0	--	kJ/m²	ISO 180/1A
Unnotched Izod Impact				
--	410	--	J/m	ASTM D4812
23°C	32	--	kJ/m²	ISO 180/1U

Amodel® A-1565 HS

polyphthalamide

Thermal	Dry	Conditioned	Unit	Test method
Deflection Temperature Under Load 1.8 MPa, Unannealed	271	--	°C	ASTM D648 ISO 75-2/A
Melting Temperature	311	--	°C	ISO 11357-3 ASTM D3418
CLTE				ASTM E831
Flow : 0 to 100°C	2.0E-5	--	cm/cm/°C	
Flow : 100 to 200°C	1.7E-5	--	cm/cm/°C	
Transverse : 0 to 100°C	3.7E-5	--	cm/cm/°C	
Transverse : 100 to 200°C	8.1E-5	--	cm/cm/°C	

Electrical	Dry	Conditioned	Unit	Test method
Volume Resistivity	4.0E+14	--	ohms·cm	ASTM D257
Arc Resistance	125	--	sec	ASTM D495
Comparative Tracking Index (CTI)	600	--	V	UL 746A

Injection	Dry	Unit
Drying Temperature	120	°C
Drying Time	4.0	hr
Suggested Max Moisture	0.030 to 0.060	%
Hopper Temperature	79	°C
Rear Temperature	304 to 318	°C
Front Temperature	316 to 329	°C
Processing (Melt) Temp	321 to 343	°C
Mold Temperature	135	°C

Injection Notes


Storage:

- Amodel® compounds are shipped in moisture-resistant packages at moisture levels according to specifications. Sealed, undamaged bags should be preferably stored in a dry room at a maximum temperature of 50°C (122°F) and should be protected from possible damage. If only a portion of a package is used, the remaining material should be transferred into a sealable container. It is recommended that Amodel® resins be dried prior to molding following the recommendations found in this datasheet and/or in the Amodel® processing guide.

Amodel® A-1565 HS

polyphthalamide

Viscosity vs. Shear Rate (ISO 11403)

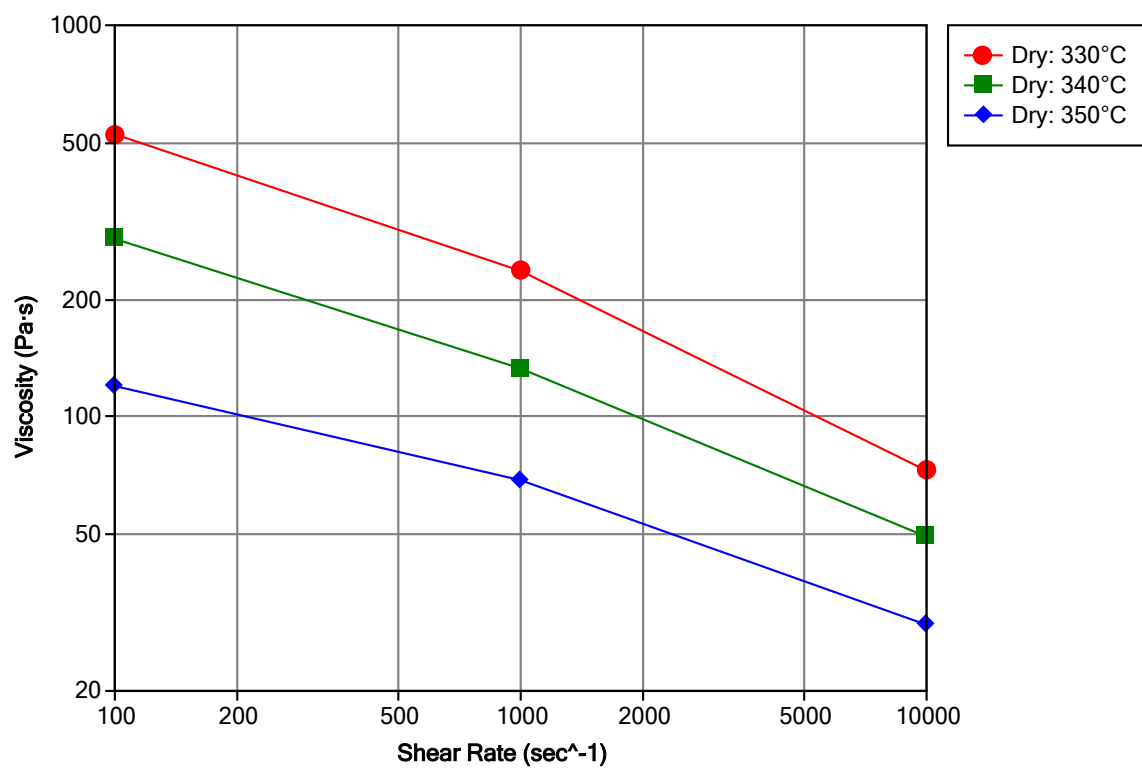

Amodel® A-1565 HS

polyphthalamide

Notes

Typical properties: these are not to be construed as specifications.



www.syensqo.com

Safety Data Sheets (SDS) are available by emailing us or contacting your sales representative. Always consult the appropriate SDS before using any of our products.

Neither Syensqo nor any of its affiliates makes any warranty, express or implied, including merchantability or fitness for use, or accepts any liability in connection with this product, related information or its use. Some applications of which Syensqo's products may be proposed to be used are regulated or restricted by applicable laws and regulations or by national or international standards and in some cases by Syensqo's recommendation, including applications of food/feed, water treatment, medical, pharmaceuticals, and personal care. Only products designated as part of the Solviva® family of biomaterials may be considered as candidates for use in implantable medical devices. The user alone must finally determine suitability of any information or products for any contemplated use in compliance with applicable law, the manner of use and whether any patents are infringed. The information and the products are for use by technically skilled persons at their own discretion and risk and does not relate to the use of this product in combination with any other substance or any other process. This is not a license under any patent or other proprietary right.

All trademarks and registered trademarks are property of the companies that comprise the Syensqo or their respective owners.

© 2024 2023 Syensqo. All rights reserved.