

# AvaSpire® AV-722

## polyaryletherketone

AvaSpire® AV-722 is an unreinforced polyaryletherketone (PAEK) that offers improved economics relative to PEEK while retaining most of PEEK's key performance attributes. AV-722 resin has been formulated for applications requiring high chemical resistance and mechanical strength

along with low moisture absorption and good barrier properties. These and other properties make this resin well-suited for applications in healthcare, transportation, electronics, chemical processing and other industries.

- Beige: AvaSpire® AV-722 BG 20

### General

Material Status	• Commercial: Active	
Availability	• Africa & Middle East • Asia Pacific • Europe	• Latin America • North America
Features	• Chemical Resistant • Ductile • Flame Retardant	• Good Dimensional Stability • Good Impact Resistance • High Heat Resistance
Uses	• Aircraft Applications • Automotive Applications • Electrical/Electronic Applications • Film • Fuel Lines	• Gears • Medical/Healthcare Applications • Oil/Gas Applications • Seals
RoHS Compliance	• Contact Manufacturer	
Appearance	• Beige	
Forms	• Pellets	
Processing Method	• Extrusion Blow Molding • Fiber (Spinning) Extrusion • Film Extrusion • Injection Blow Molding • Injection Molding	• Machining • Profile Extrusion • Thermoforming • Wire & Cable Extrusion

Physical	Typical Value	Unit	Test method
Density / Specific Gravity	1.32		ASTM D792
Melt Mass-Flow Rate (MFR) (400°C/2.16 kg)	1.0	g/10 min	ASTM D1238
Molding Shrinkage <sup>1</sup>			ASTM D955
Flow : 3.18 mm	0.80 to 1.0	%	
Across Flow : 3.18 mm	1.2 to 1.4	%	
Water Absorption (24 hr)	0.10	%	ASTM D570

Mechanical	Typical Value	Unit	Test method
Tensile Modulus			
-- <sup>2</sup>	3700	MPa	ASTM D638
--	3900	MPa	ISO 527-1/1A/1

# AvaSpire® AV-722

## polyaryletherketone

Mechanical	Typical Value	Unit	Test method
Tensile Stress			
Yield	91.0	MPa	ISO 527-2/1A/50
-- <sup>2</sup>	89.0	MPa	ASTM D638
Tensile Elongation			
Yield <sup>2</sup>	5.0	%	ASTM D638
Yield	4.5	%	ISO 527-2/1A/50
Break <sup>2</sup>	25	%	ASTM D638
Break	25	%	ISO 527-2/1A/50
Flexural Modulus			
--	3700	MPa	ASTM D790
--	3800	MPa	ISO 178
Flexural Strength			
--	141	MPa	ASTM D790
--	138	MPa	ISO 178
Compressive Strength	112	MPa	ASTM D695
Shear Strength	79.0	MPa	ASTM D732
Poisson's Ratio	0.43		ASTM E132
Impact	Typical Value	Unit	Test method
Notched Izod Impact			
--	80	J/m	ASTM D256
--	7.0	kJ/m <sup>2</sup>	ISO 180
Unnotched Izod Impact	No Break		ASTM D4812 ISO 180
Hardness	Typical Value	Unit	Test method
Rockwell Hardness (M-Scale)	95		ASTM D785
Thermal	Typical Value	Unit	Test method
Deflection Temperature Under Load <sup>3</sup>			ASTM D648
1.8 MPa, Annealed, 3.20 mm	161	°C	
Glass Transition Temperature	150	°C	ASTM D3418
Peak Melting Temperature <sup>4</sup>	340	°C	ASTM D3418
CLTE - Flow (-50 to 50°C)	4.5E-5	cm/cm/°C	ASTM E831
Specific Heat			DSC
50°C	1410	J/kg/°C	
200°C	1970	J/kg/°C	
Thermal Conductivity	0.22	W/m/K	ASTM E1530

# AvaSpire® AV-722

## polyaryletherketone

Electrical	Typical Value	Unit	Test method
Surface Resistivity	> 1.9E+17	ohms	ASTM D257
Volume Resistivity	3.1E+17	ohms·cm	ASTM D257
Dielectric Strength			ASTM D149
0.0500 mm, Amorphous Film	170	kV/mm	
3.00 mm	19	kV/mm	
Dielectric Constant			ASTM D150
60 Hz	3.12		
1 MHz	3.06		
Dissipation Factor			ASTM D150
60 Hz	1.0E-3		
1 MHz	4.0E-3		

Flammability	Typical Value	Unit	Test method
Oxygen Index	40	%	ASTM D2863


Fill Analysis	Typical Value	Unit
Melt Viscosity (400°C, 1000 sec <sup>-1</sup> )	450	Pa·s

Injection	Typical Value	Unit
Drying Temperature	149	°C
Drying Time	4.0	hr
Rear Temperature	354	°C
Middle Temperature	366	°C
Front Temperature	371	°C
Nozzle Temperature	374	°C
Mold Temperature	177 to 204	°C
Injection Rate	Fast	
Screw Compression Ratio	2.5:1.0 to 3.5:1.0	


Injection Notes
Back Pressure: Minimum

Isothermal Stress vs. Strain (ISO 11403)

---

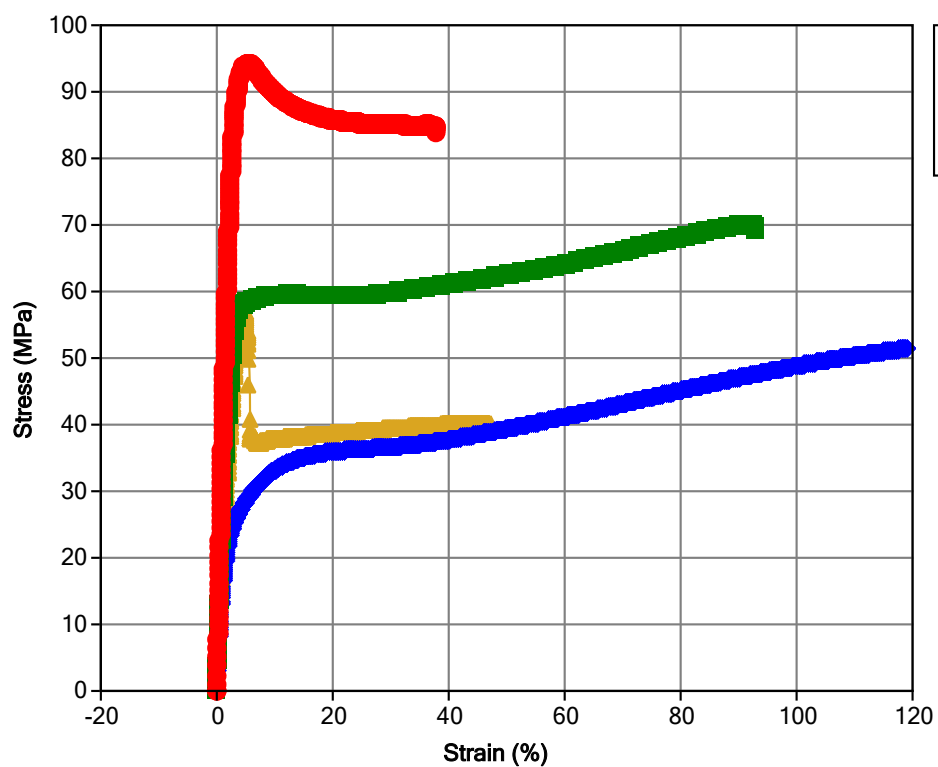

Viscosity vs. Shear Rate (ISO 11403)

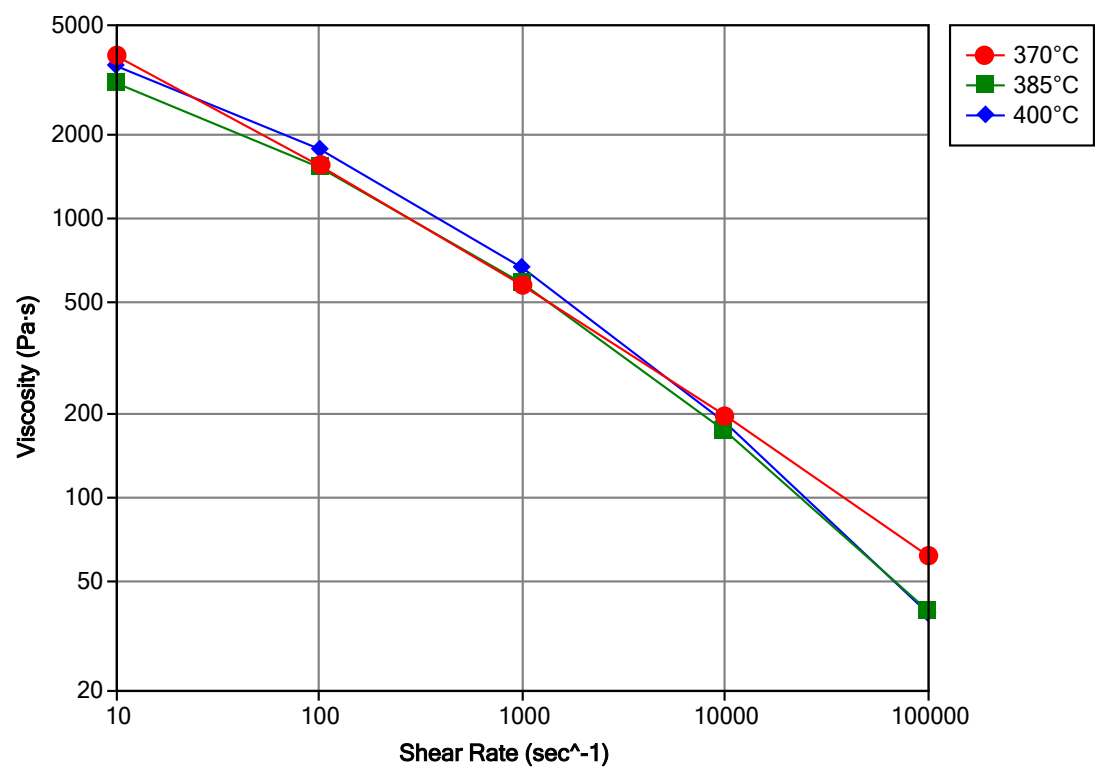

# AvaSpire® AV-722

## polyaryletherketone

---

## Notes

---

Typical properties: these are not to be construed as specifications.

<sup>1</sup> 5" x 0.5" x 0.125"

<sup>2</sup> 50 mm/min

<sup>3</sup> 2 hours at 200°C

<sup>4</sup> For major component

---

## [www.syensqo.com](http://www.syensqo.com)

Safety Data Sheets (SDS) are available by emailing us or contacting your sales representative. Always consult the appropriate SDS before using any of our products.

Neither Syensqo nor any of its affiliates makes any warranty, express or implied, including merchantability or fitness for use, or accepts any liability in connection with this product, related information or its use. Some applications of which Syensqo's products may be proposed to be used are regulated or restricted by applicable laws and regulations or by national or international standards and in some cases by Syensqo's recommendation, including applications of food/feed, water treatment, medical, pharmaceuticals, and personal care. Only products designated as part of the Solviva® family of biomaterials may be considered as candidates for use in implantable medical devices. The user alone must finally determine suitability of any information or products for any contemplated use in compliance with applicable law, the manner of use and whether any patents are infringed. The information and the products are for use by technically skilled persons at their own discretion and risk and does not relate to the use of this product in combination with any other substance or any other process. This is not a license under any patent or other proprietary right.

All trademarks and registered trademarks are property of the companies that comprise the Syensqo or their respective owners.

© 2024 2023 Syensqo. All rights reserved.

